

OW1220 – CYPRESS™

Outdoor only



Type: Project:

VisaLighting.com/products/Cypress

Fill in shaded boxes using information listed below

Order Code: **OW1220**
MODEL

A SOURCE


– **MVOLT**
VOLTAGE

B HOUSING

C ACCENT BAR

D OPTION

Finishes

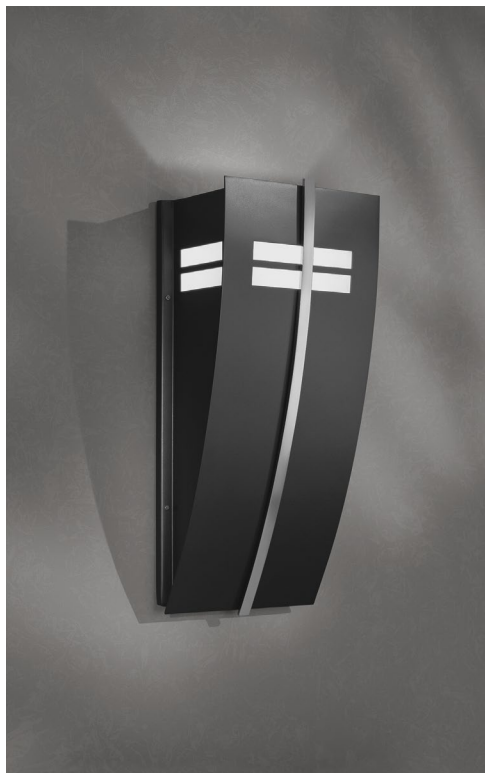


The profile and light output of this series is punctuated with geometric windows of light and are available in three sizes that can be mounted in either the up or down position.

DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W 8" (203 mm)
H 18-3/4" (457 mm)
D 6" (152 mm)



A SOURCE (Select one) and VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage 83CRI, within 3-step MacAdam and are dimmable 0-10V to 1%

LED Sources	CCT	Delivered Lumens	Power (Watts)	Voltage
• L30K-L	3000K	350	10	MVOLT
L35K-L	3500K			
• L40K-L	4000K			
• L30K-H	3000K	750	21	
L35K-H	3500K			
• L40K-H	4000K			

FINISHES (Select one **B** Housing Finish and one **C** Accent Bar Finish or Material)

See page 2 for color chart

Powder Coat Painted Finishes (Standard) for Housing or Accent Bar

AG7038 Agate Grey	CVBL Cove Blue	GW9002 Grey White	PB1035 Pearl Beige
BMAT Bronze Matte	CW9001 Cream White	HTHR Heather	RUST Rust
BRNZ Bronze	GLIM Glimmer	JB9005 Jet Black	SUNG Sungold
BSIL Blade Silver	GSIL Graphite Silver	OBRZ Old Bronze	TW9016 Traffic White

Metals (Premium) for Accent Bar only

BSS Brushed Stainless Steel

PSS Polished Stainless Steel



D OPTION

XPS Express 10 day shipping. Items marked with a bullet (•) are not available with XPS



XPS



ETL Listed




5 Year Warranty

OW1220 – CYPRESS
Outdoor only




Photometrics

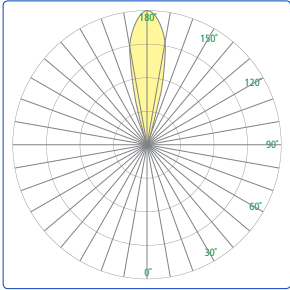

Technical Information


- Integral power supply
- Fixture tested per LM79 standard
- Modular design for replacement of LED source and power supply
- Uplight or downlight application
- Surface mounts over a standard electrical junction box (by others)
- Clear tempered glass top lens
- 1/8" thick white acrylic diffuser
 - ◆ F1 rated, UV stable
 - ◆ UL-94 HB Flame Class rated
- Housing fabricated of heavy gauge welded and gasketed aluminum
- No VOC powder coat paint finish
- ETL listed for wet location mounting 4' above grade

Relative Scale Drawing

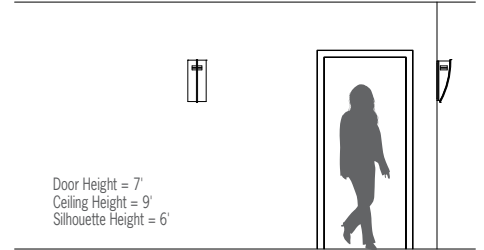

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see VisaLighting.com/materials-finishes

Painted Finishes (Standard)

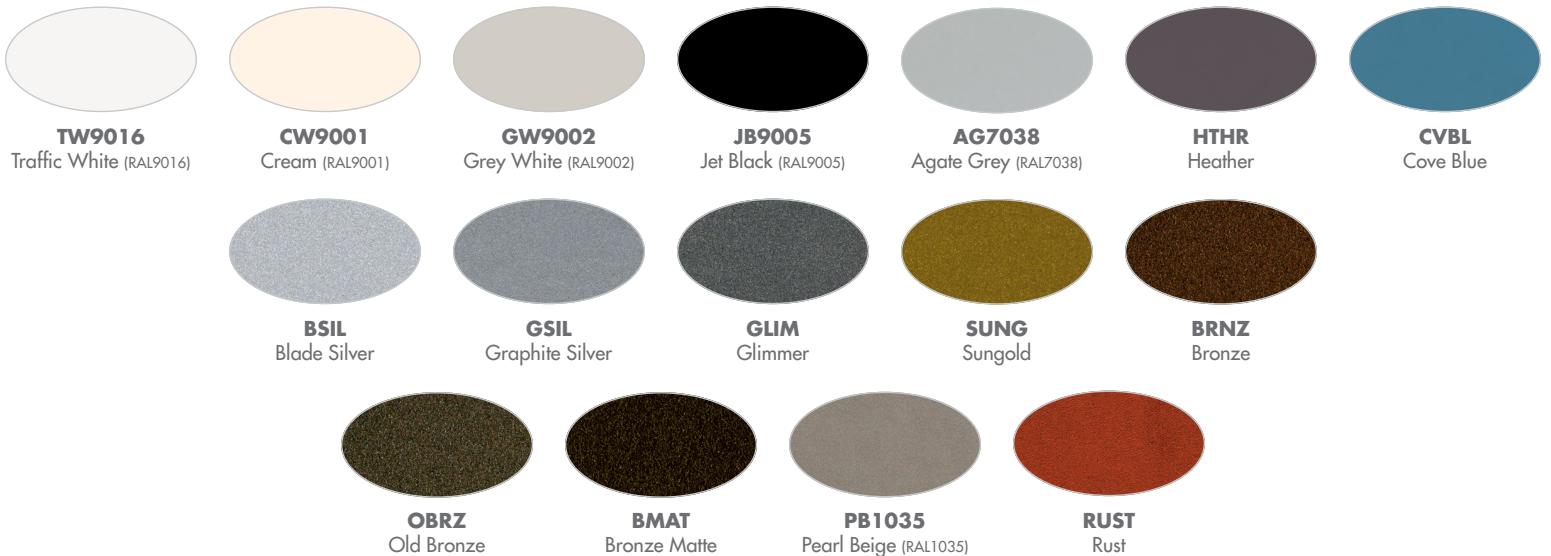

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.