

**OW1224 – CYPRESS™**  
Outdoor only



Type: Project:

[VisaLighting.com/products/Cypress](http://VisaLighting.com/products/Cypress)

Fill in shaded boxes using information listed below

Order Code: **OW1224**  
MODEL

**A** SOURCE

– **MVOLT**  
VOLTAGE

**B** HOUSING

**C** ACCENT BAR

**D** OPTION

Finishes




The profile and light output of this series is punctuated with geometric windows of light and are available in three sizes that can be mounted in either the up or down position.

**DIMENSIONS**

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W 13-1/2" (343 mm)  
H 33-1/8" (841 mm)  
D 10" (254 mm)

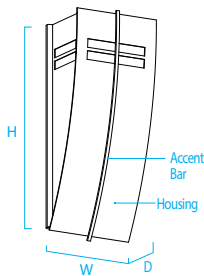

**A** SOURCE (Select one) and VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage  
LED Sources are 83CRI, within 3-step MacAdam and are dimmable 0-10V to 1%

LED Sources	CCT	Delivered Lumens	Power (Watts)	Voltage
• L30K-L	3000K	950	20	MVOLT
L35K-L	3500K			
• L40K-L	4000K			
• L30K-H	3000K	1900	46	
L35K-H	3500K			
• L40K-H	4000K			

**FINISHES** (Select one **B** Housing Finish and one **C** Accent Bar Finish or Material)

See page 2 for color chart

Powder Coat Painted Finishes (Standard) for Housing or Accent Bar

<b>AG7038</b> Agate Grey	<b>CVBL</b> Cove Blue	<b>GW9002</b> Grey White	<b>PB1035</b> Pearl Beige
<b>BMAT</b> Bronze Matte	<b>CW9001</b> Cream White	<b>HTHR</b> Heather	<b>RUST</b> Rust
<b>BRNZ</b> Bronze	<b>GLIM</b> Glimmer	<b>JB9005</b> Jet Black	<b>SUNG</b> Sungold
<b>BSIL</b> Blade Silver	<b>GSIL</b> Graphite Silver	<b>OBRZ</b> Old Bronze	<b>TW9016</b> Traffic White

Metals (Premium) for Accent Bar only

**BSS** Brushed Stainless Steel

**PSS** Polished Stainless Steel



**D** OPTION

**XPS** Express 10 day shipping. Items marked with a bullet (•) are not available with XPS



XPS



ETL Listed




5 Year Warranty

**OW1224 – CYPRESS**  
Outdoor only




**Photometrics**

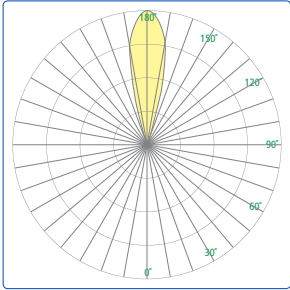

**Technical Information**


- Integral power supply
- Fixture tested per LM79 standard
- Modular design for replacement of LED source and power supply
- Uplight or downlight application
- Surface mounts over a standard electrical junction box (by others)
- Clear tempered glass top lens
- 1/8" thick white acrylic diffuser
  - ◆ F1 rated, UV stable
  - ◆ UL-94 HB Flame Class rated
- Housing fabricated of heavy gauge welded and gasketed aluminum
- No VOC powder coat paint finish
- ETL listed for wet location mounting 4' above grade

**Relative Scale Drawing**

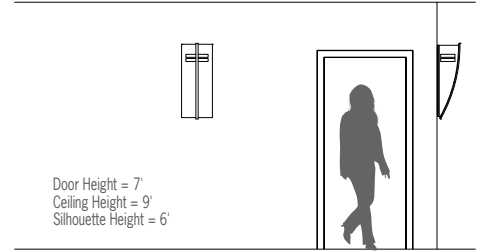

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see [VisaLighting.com/materials-finishes](http://VisaLighting.com/materials-finishes)

**Painted Finishes (Standard)**

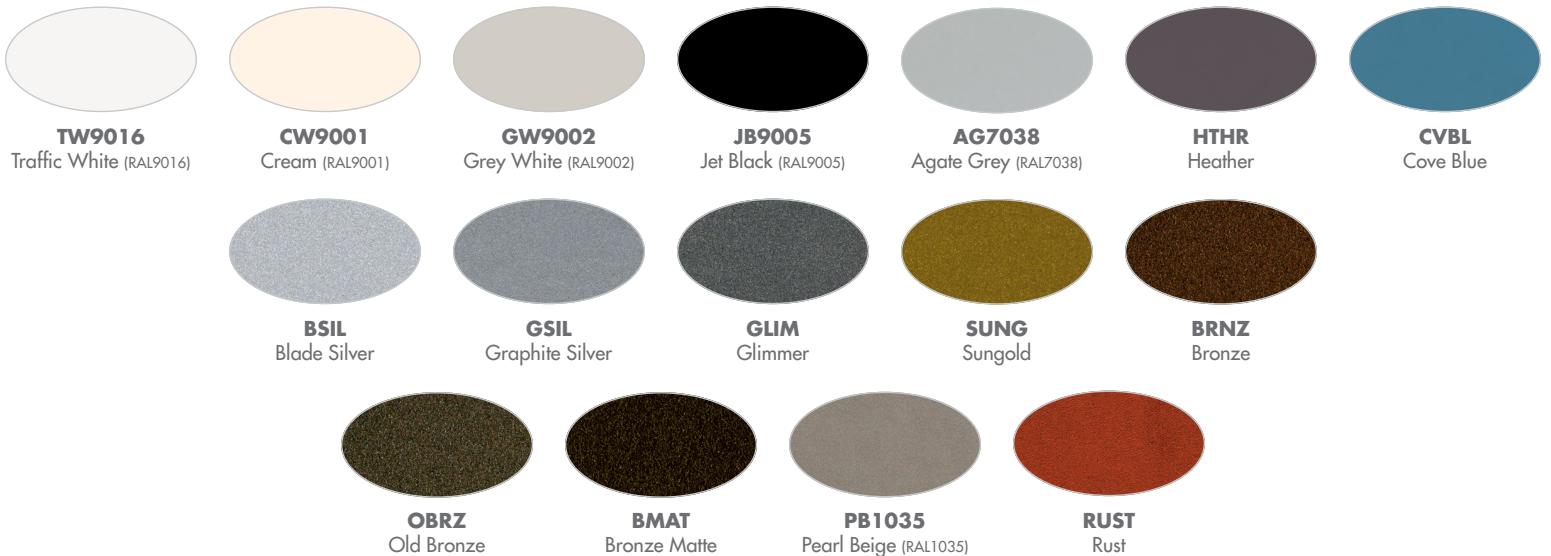

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.