

WAND™


CV4180 and CV4181

Semi-Recessed - Integral Driver



Visalighting.com/products/Wand

Type: _____ Project: _____ Location: _____

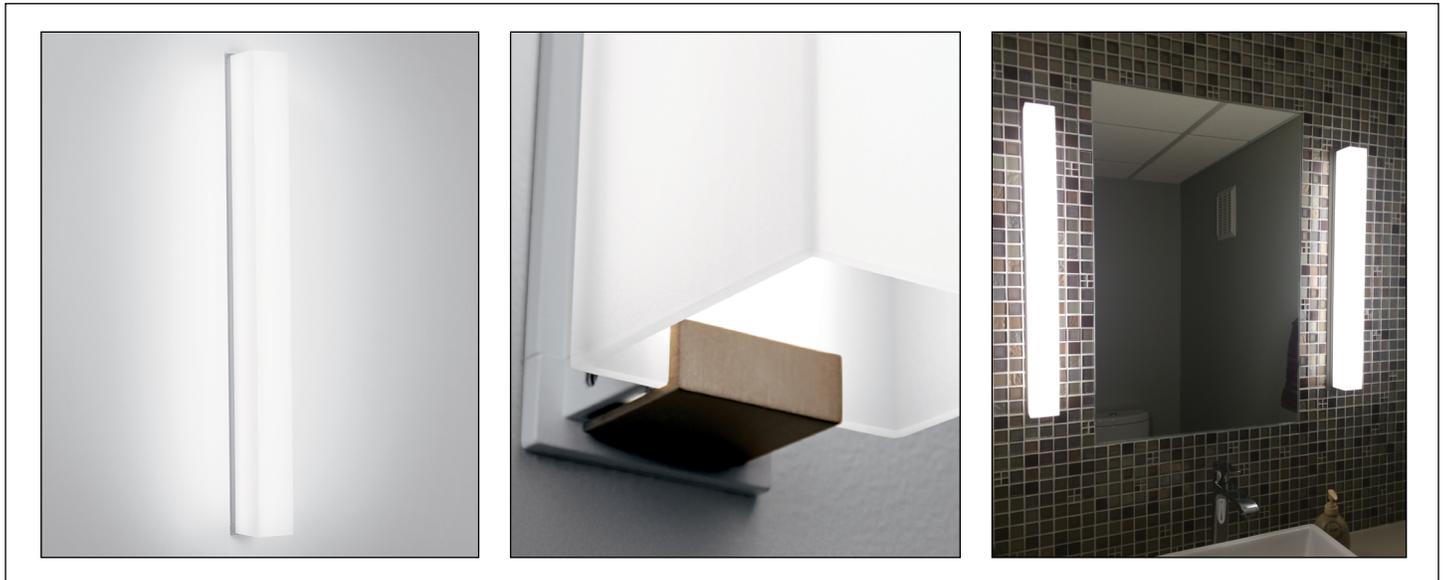


DIMENSIONS¹

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth RW = Recessed Width
RH = Recessed Height RD = Recessed Depth


	CV4180	CV4181
W	23-1/2" (597 mm)	34-1/2" (876 mm)
H	2" (51 mm)	
D	2-3/4" (70 mm)	
RW	23-3/4" (603 mm)	34-3/4" (883 mm)
RH	1-7/8" (48 mm)	
RD	3-1/4" (83 mm)	

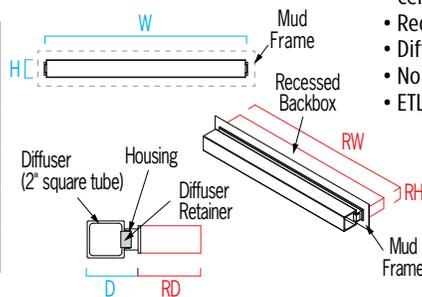


FEATURES

- Integral driver included
- Versatile mounting; ceiling or wall mount (vertical or horizontal orientation)
- Semi-recessed (mud required; mud frame included)
- Ceiling installations for drywall only
- Recessed backbox is available for pre-shipment for rough-in installation
- Diffuser is 1/8" thick extruded white acrylic with frosted finish
- No VOC powder coat paint finish; low VOC clear coat on metal finishes
- ETL listed for damp locations

RELATIVE SCALE DRAWING

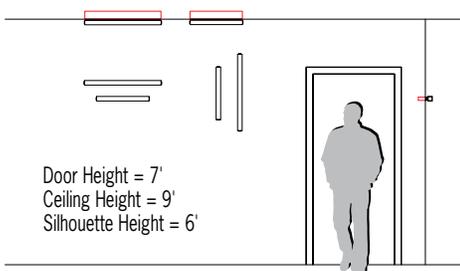

PHOTOMETRICS



ADA Compliant



XPS



ETL Listed



5 Year Warranty

WAND (cont.)

CV4180 and CV4181

Semi-Recessed - Integral Driver

Fill in shaded boxes using information listed below

- MVOLT					
MODEL¹ CV4180 CV4181 See page 1	SOURCE² • L30K(H) • L30K(L) • L35K(H) • L35K(L) • L40K(H) • L40K(L)	VOLTAGE MVOLT	DIFFUSER RETAINER FINISH See last page for finish order codes	HOUSING FINISH See last page for finish order codes	OPTION(S)³ DCC RB TTF (Finish) XPS

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	CV4180		CV4181	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	1100	14	1600	21
• L30K(L)	3000K	750	10	1100	13
L35K(H)	3500K	1100	14	1600	21
L35K(L)	3500K	750	10	1100	13
• L40K(H)	4000K	1100	14	1700	21
• L40K(L)	4000K	750	10	1100	13

OPTIONS³ (Multiple Selections Allowed)


⚠ Option availability may be interdependent with other options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
RB	Pre-ship recessed backbox
TTF	Tile Trim Flange; Painted - specify Finish Code (see finishes)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS


VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

TILE TRIM FLANGE DETAIL (TTF OPTION)



MOUNTING DETAIL



WAND (cont.)

CV4180 and CV4181

Semi-Recessed – Integral Driver

WAND PRODUCT FAMILY

- CV4180 - 24" Semi-Recessed - Integral Driver
- CV4181 - 35" Semi-Recessed - Integral Driver
- CV4185 - 24" Surface Mount - Remote Driver
- CV4186 - 35" Surface Mount - Remote Driver

SUGGESTED VARIATIONS

- 2700K
- Custom color
- Nominal 4' height

See [Visalighting.com/products/Wand](https://visalighting.com/products/Wand) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard) Powder coat finishes available for Diffuser Retainer or Housing

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium) Metal finishes available for Diffuser Retainer

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum