
CP2800 Model: Fixture Family: Volare


Document Description: Installation Instructions for

LED Series Luminaires

Volare Pendant CP2800 - length

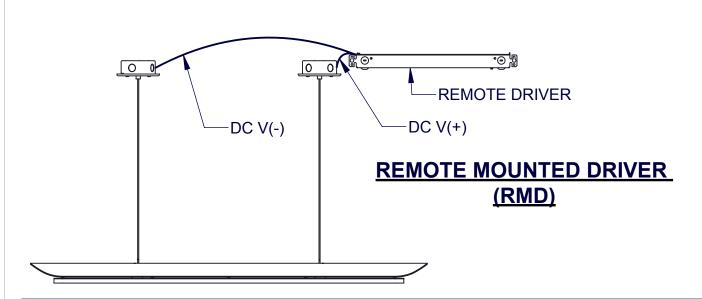

SURFACE DRIVER CANOPY (SDC)



CONTENTS:

Sheet 2: Dimensions

Sheet 3: Shipping notes and installing the curved acrylic

Sheet 4: RMD option - canopy and remote power supply mounting

Sheet 5: SDC option - canopy mounting

Sheet 6: Overhand knot details and SDC option - auxiliary mounting

hole dimensions

When using electrical equipment, basic safety precautions should always be followed, including the following:

Read all instructions carefully before installing and save for future use.
Make sure all connections are in accordance with the National Electrical Code and local regulations.
To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture
Sorvice should be performed by qualified personal.

Service should be performed by qualified personnel.

• These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.


Drawing: **762367XX** Sheet: 1 of 6

Date Drawn: 10/11/21


CP2800 Model: Fixture Family: Volare

Document Description: Installation Instructions for

LED Series Luminaires

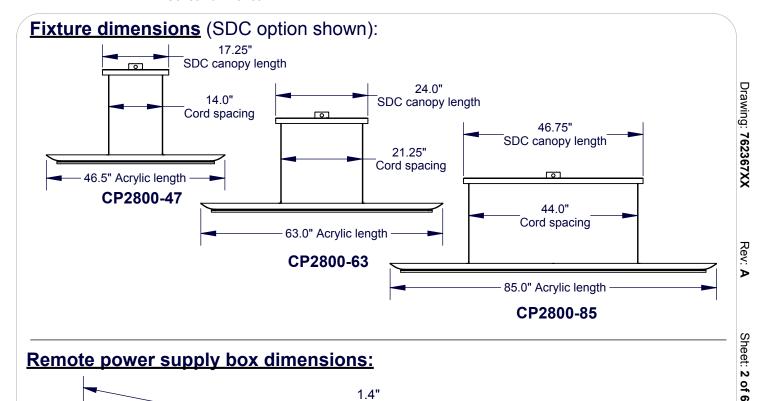


Remote power supply box dimensions:

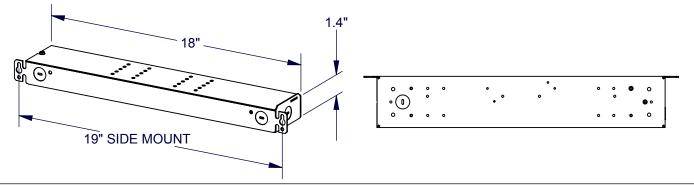

Distance between the canopies when remote driver:

Distance between canopies will change depending on the model ordered. See dimensions below.

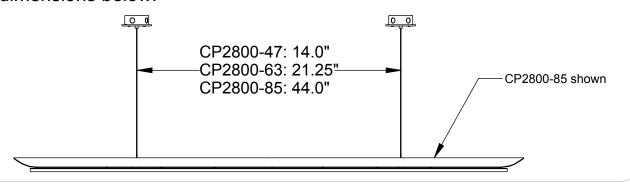

When using electrical equipment, basic safety precautions should always be followed, including the following:

When using electrical equipment, basic safety precautions should always be followed, including the following.
Read all instructions carefully before installing and save for future use.
Make sure all connections are in accordance with the National Electrical Code and local regulations.
To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture
Service should be performed by qualified personnel.
These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Date Drawn: 10/11/21


Eng:

CP2800 Model: Fixture Family: Volare

Document Description: Installation Instructions for


LED Series Luminaires

of 6

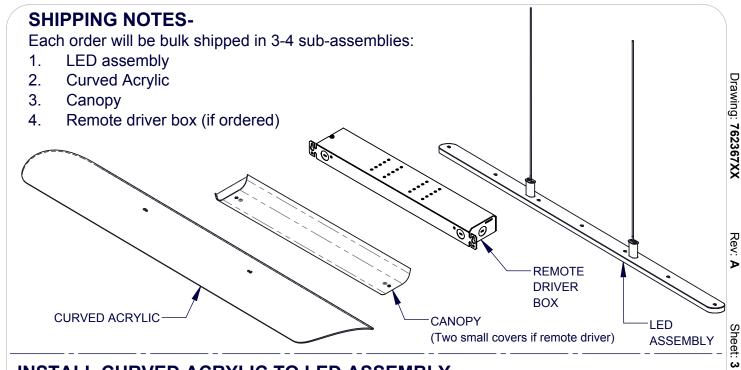

INSTALL CURVED ACRYLIC TO LED ASSEMBLY-

- 1. Remove the flat head screws from the LED assembly. These will be used to install the acrylic.
- 2. Pull power cords through holes closest to the center of the acrylic.
- 3. Install the two flat head screws into outside holes near power cord to secure curved acrylic.

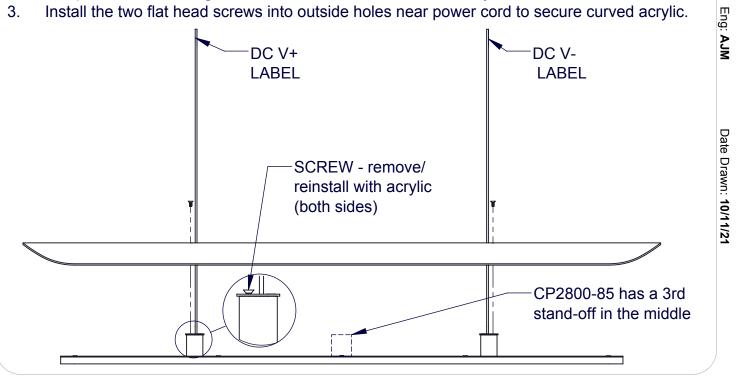

When using electrical equipment, basic safety precautions should always be followed, including the following:

When using electrical equipment, basic safety precautions should always be followed, including the following.
Read all instructions carefully before installing and save for future use.
Make sure all connections are in accordance with the National Electrical Code and local regulations.
To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture
Service should be performed by qualified personnel.
These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.


CP2800 Model: Fixture Family: Volare

Document Description: Installation Instructions for

LED Series Luminaires

RMD (Remote Mounted Driver) Option-Canopy Mounting


- 1. Two of the below canopies/fixture. A single conductor power cord is used. V+ on one side and V- on the other.
- Fasten the mounting plate to the junction box 2. with the junction box mounting screws (by others).
- Feed the power cord through the center of 3. the canopy cover and into the power cord clamp. Tighten the screws on the power cord clamp to hold the fixture up. Adjust the height of the fixture and make sure it is level.
- Make all wire connections per local and 4. national codes.
- Lift Canopy cover in place and secure with 5. canopy screws.
- 6. Tighten the set screw in the middle of the canopy cover for extra security.

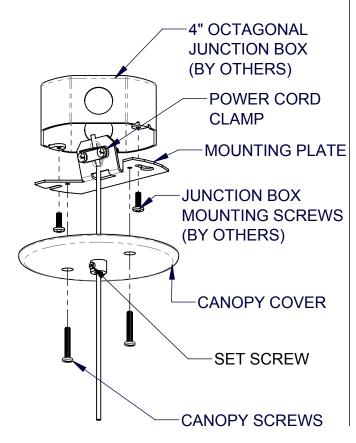

RMD (Remote Mounted Driver) Option-**Driver Box Mounting**

Components may vary depending on options ordered.

- 1. Remove cover by removing the cover screw.
- 2. Mount remote box in an accessible area per local and national codes, use fasteners appropriate for the mounting surface (not included).
- 3. Make all wire connections per local and national codes.

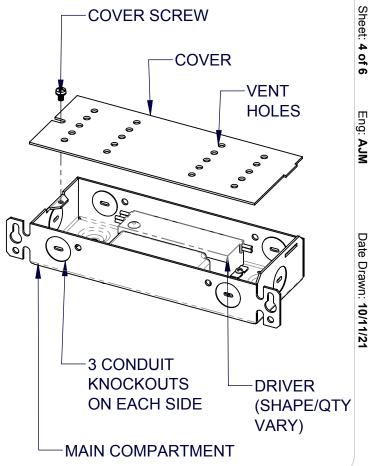

When using electrical equipment, basic safety precautions should always be followed, including the following:

• Read all instructions carefully before installing and save for future use.
• Make sure all connections are in accordance with the National Electrical Code and local regulations.
• To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture
• Service should be performed by qualified personnel.
• These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Drawing: **762367XX**

CP2800 Model: Fixture Family: Volare

Document Description: Installation Instructions for

LED Series Luminaires


Design Modification Rights Reserved © Visa Lighting 2016

Canopy Parts

Ba - Canopy Kit

Bb - Cover

Bc - Cover Screws



1. Remove the Cover Screws (Bc) holding onto the Cover (Bb). Save for later.

2. Fasten the Canopy Kit (Ba) to ceiling using the anchor mounting holes (screws/anchors provided by others).


3. Connect the White, Black and Green wires per local and national codes and then push them into the junction box. Connect the 0-10V dimming wires or cap them off.

4. Pull the fixture power cords through the two holes in the cover (Bb) and through the clamps on each side of the canopy kit (Ba). Tighten screws on each clamp to hold power cord down and support the weight of the fixture.

5. Tie an overhand knot on both sides - to prevent the fixture from falling if excess weight is applied. See Sheet 6 for further details.

6. Connect the driver to the two fixture power cords. Each power cord has a single conductor. One cord for (V+) and another for (V-). The power cords will be labeled.

7. Lift the Cover (Bb) in place and reinstall the screws (Bc) that were removed in step 1.

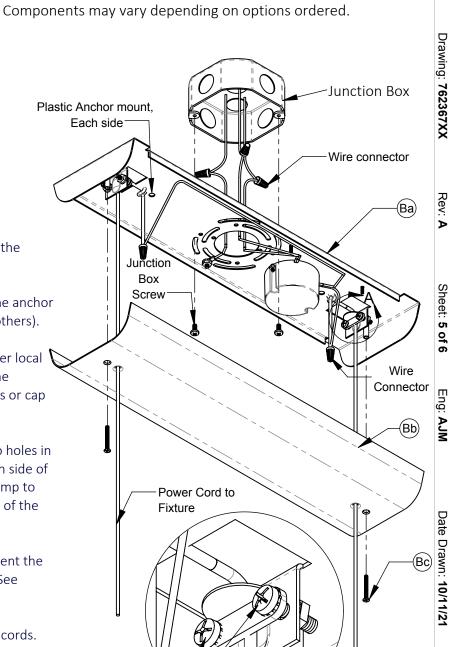

DETAIL A

SCALE 1:1

When using electrical equipment, basic safety precautions should always be followed, including the following:

Read all instructions carefully before installing and save for future use.
Make sure all connections are in accordance with the National Electrical Code and local regulations.
To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture

Service should be performed by qualified personnel.

• These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Tighten screws to clamp power

cord down

SDC option canopy mounting:


Model: **CP2800** Fixture Family: Volare

Document Description: Installation Instructions for


LED Series Luminaires

How to tie an Overhand knot:

Required above the power cord to prevent catestrophic failures

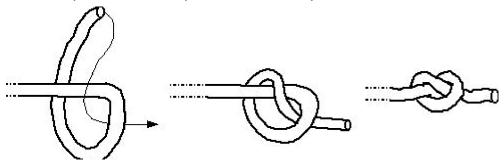


SDC option- Overhand knot location:

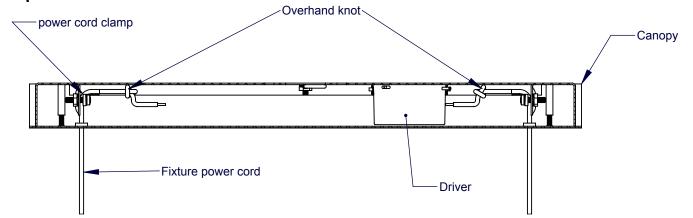

SDC option- Auxiliary mounting hole dimensions:

Auxilary mounting required with the SDC option canopy

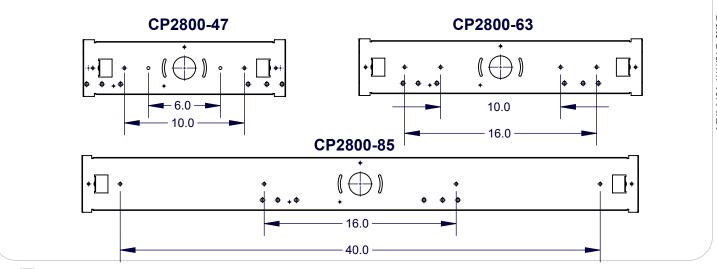

When using electrical equipment, basic safety precautions should always be followed, including the following:

• Read all instructions carefully before installing and save for future use.

• Make sure all connections are in accordance with the National Electrical Code and local regulations.

• To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture

• Service should be performed by qualified personnel.

• These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Sheet: 6 of 6 Eng: AJM

Drawing: **762367XX**

Date Drawn: 10/11/21