

# CM2084-T JASPER

## 2'x4' Tunable



[VisaLighting.com/products/Jasper](https://VisaLighting.com/products/Jasper)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




### DIMENSIONS

W = Width    L = Length    RD = Recessed Depth

L 47-3/4" (1213 mm)  
 W 23-3/4" (603 mm)  
 RD 3" (76 mm)

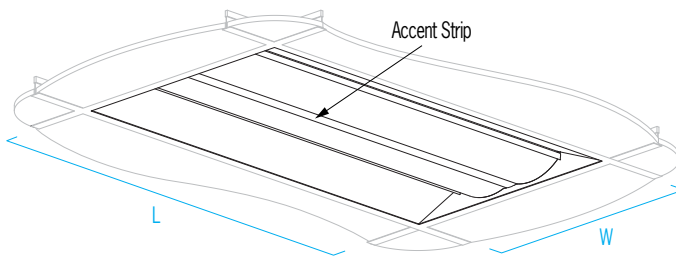


### RELATIVE SCALE DRAWING

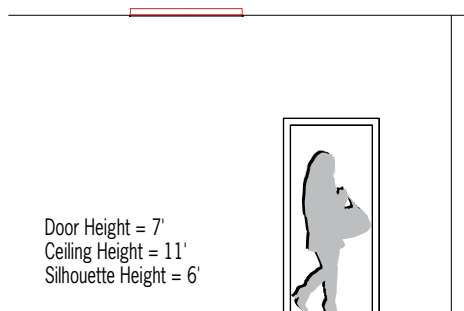

### FEATURES

- Integral driver
- Multiple levels of lumen output
- Low plenum depth enables use in “busy” recessed plenums or retrofit projects
- Mounts to standard 15/16”, 9/16”, or screw-slot grid ceiling systems
- Integral T-bar retaining clips
- Integral mounting points for suspension cables (by others) to building structure
- Optional NEC Article 410 compliant “earthquake clips” (EQC option)
- Optional flange kit for mounting to drywall ceilings (SRI option)
- Extruded, frosted acrylic lens with diffusing optical film
- Die-formed enclosure
- Fabricated aluminum accent strip available in Non VOC powder coat, brushed aluminum, and eight exclusive, eco-friendly alternative finishes
- Not suitable for insulation contact
- ETL listed for damp locations. Not suited for exterior applications

### PHOTOMETRICS

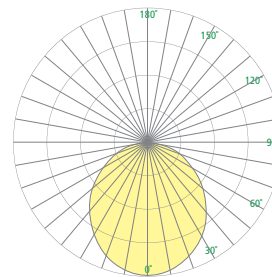

# CM2084-T JASPER (cont.)

## 2'x4' Tunable



Fill in shaded boxes using information listed below

CM2084-T

MODEL

SOURCE<sup>1</sup>  
TUN2(H)  
TUN2(L)  
TUN2(VL)

VOLTAGE<sup>2</sup>  
MVOLT  
347V

ACCENT STRIP  
FINISH

See last page for  
finish order codes

OPTION(S)<sup>4</sup>  
DCC  
EQC  
SRI  
WHIP

SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 10%, Minimum 90CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens	Power (Watts)
TUN2(H)	2700K - 6500K	5800	50
TUN2(L)		3800	33
TUN2(VL)		1950	16

Lumens data shown is at 3500K. Lumens can vary slightly as CCT changes

VOLTAGE<sup>2</sup> (Select one)

MVOLT	120-277V, 50/60 Hz
347V	50/60 Hz (Not available with IEM option)

LUMEN MAINTENANCE RATING

L80 (reported)	>50,000 hrs
----------------	-------------

Reported Lifetime per IES TM-21

OPTION(S)<sup>3</sup> (Multiple selections allowed)

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
EQC	"Earthquake clip" t-bar mounting brackets (2 provided)
SRI	Drywall ceiling mounting kit
WHIP	Pre-wired 6-foot long 18AWG flex conduit whip, conductors per fixture configuration (contact factory for details)

# CM2084-T JASPER (cont.)

## 2'x4' Tunable



### JASPER PRODUCT FAMILY

- CM2082-W – 2'x2' White
- CM2082-T – 2'x2' Tunable
- CM2084-W – 2'x4' Tunable
- CM2084-T – 2'x4' Tunable
- CM2094 – 2'x4' Overbed

See [Visalighting.com/Products/Jasper](https://visalighting.com/Products/Jasper) for more information

### SUGGESTED VARIATION

- Custom colors

# CM2084-T JASPER (cont.)

## 2'x4' Tunable



### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red

#### Alternative Metal Finishes (Premium)

<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative

#### Metal Finish (Premium)

<b>BA</b> Brushed Aluminum